
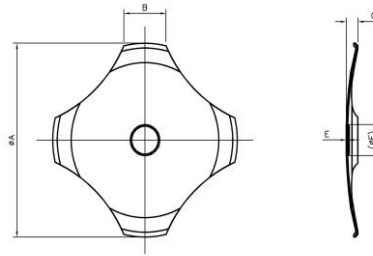


CDN



Outer Diameter ØA	Part No.	Material Thickness	Leg Width B	Height C	Dimple Depth E	Dimple Diameter ØF	Trip Force	Plating	Contact Life cycle	PCB Layout Suggestion	
										Single Sided	Double Sided
5 mm	5-CDN-180 (2M)	0.06	0.90	0.31 ±0.05	0.06 ±0.04	(Ø 1.0)	180 g ±30	bare	TBA	TBA	TBA
	5-CDN-230 (2M)	0.06	0.90	0.35 ±0.05	0.06 ±0.04	(Ø 1.0)	230 g ±30	bare	TBA	TBA	TBA
	DN 5-CDN-230 (2M)	0.06	0.90	0.36 ±0.05	0.06 ±0.04	(Ø 1.0)	230 g ±30	nickel on both side	TBA	TBA	TBA
	SG 5-CDN-200 (2M)	0.06	0.90	0.29 ±0.05	0.02 ~ 0.06	(Ø 1.0)	200 g ±30	gold on contact side	TBA	TBA	TBA
8.4 mm	DN 8.4-CDN-300	0.08	1.79	0.48 ±0.05	0.06 ±0.04	(Ø 1.4)	300 g ±30	nickel on both side	>1,000,000	TBA	TBA
	SG 8.4-CDN-300	0.08	1.79	0.53 ±0.05	0.08 ±0.05	(Ø 1.4)	300 g ±30	gold on contact side	>500,000	TBA	TBA
	SG 8.4-CDN-400	0.08	1.79	0.53 ±0.05	0.08 ±0.05	(Ø 1.4)	400 g ±30	gold on contact side	>300,000	TBA	TBA
10 mm	DN 10-CDN-350	0.10	2.28	0.63 ±0.05	0.08 ±0.05	(Ø 1.6)	350 g ±30	nickel on both side	>300,000	TBA	TBA

REMARK:

Information up to 15/01/2017.

All dimensions in millimeter unless otherwise specified.

Dimensions in brackets are the design value, there may be a slight difference in actual product.

All dimensions subject to change without any notice.